



CUSHMAN®

TITAN® XD



MEET THE REAL INDUSTRY GIANT.

Built to shoulder the biggest loads, the Titan® XD shows up to work with 3,000 pounds of hauling power and 5,000 pounds of towing capacity. A large cargo deck and two- or four-passenger seating gives you plenty of space for all the crew and cargo you can throw at it.

LET'S WORK.®

48V
ELECTRIC
POWERTRAIN

2 & 4
PASSENGER
MODELS

3000LB
VEHICLE LOAD
CAPACITY



2-PASSENGER




4-PASSENGER

CUSHMAN® TITAN® XD



STANDARD HALOGEN HEADLIGHTS

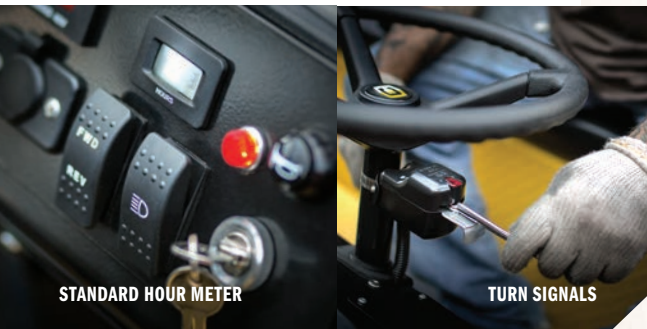

STANDARD HOUR METER

TURN SIGNALS



OPTIONAL PINTLE HITCH

OPTIONS & ACCESSORIES

- Non-Marking Tires
- Front & Rear Bumper
- Hard Cab (w/ or w/out Doors)
- Pintle Hitch (requires rear bumper)
- Clevis Hitch (requires rear bumper)
- Custom Color
- Headlights (LED)
- Turn Signals

	2-PASSENGER	4-PASSENGER
BODY & CHASSIS		
FRAME	Welded Steel with DuraShield™ Powder Coat	
BODY & FINISH	Diamond Plate Patterned, Poly Primer & Acrylic	
STANDARD COLOR	Yellow	
DIMENSIONS		
OVERALL LENGTH	114.0 in (290 cm)	
OVERALL WIDTH	44.5 in (113 cm)	
OVERALL HEIGHT	47.0 in (119 cm)	
HEIGHT W/ OPTIONAL CAB	72.0 in (183 cm)	
WHEEL BASE	67.0 in (170 cm)	
FRONT WHEEL TRACK	38.0 in (96.0 cm)	
REAR WHEEL TRACK	38.0 in (96.0 cm)	
GROUND CLEARANCE	5.0 in (12 cm)	
CARGO DECK CAPACITY	41.5 in (105) W x 75 in (191 cm) L	41.5 in (105) W x 53.5 in (136 cm) L
CARGO DECK MATERIAL	Heavy Duty Plywood	
POWER		
POWER SOURCE	48-Volt DC Shunt Wound	
HORSEPOWER (KW)	17.2 hp (12.8 kw) Peak	
ELECTRICAL SYSTEM	48-Volt DC	
BATTERY (QTY/TYPE)	Eight, 6-Volt Deep Cycle, Swing Out	
BATTERY CHARGER	48-Volt On-Board, Delta Q 120 VAC, UL & CSA	
KEY OR PEDAL START	Pedal Start	
SPEED CONTROLLER	Solid State 400 Amp Precision Drive System	
DRIVE TRAIN	Motor Shaft Direct Drive	
TRANSAXLE	Differential with Helical Gears	
GEAR SELECTION	Dash Mounted Forward-Neutral-Reverse	
REAR AXLE RATIO	14.9:1 (17:1 EE)	
PERFORMANCE		
SEATING CAPACITY	2-Person	4-Person
WEIGHT W/O BATTERIES	1208 lb (548 kg)	1225 lb (560 kg)
CURB WEIGHT	1752 lb (795 kg)	1720 lb (780 kg)
VEHICLE LOAD CAPACITY	3000 lb (1361 kg) / 2000 lb (907 kg) EE	
CARGO DECK LOAD CAPACITY	2600 lb (1179 kg) / 1600 lb (726 kg) EE	2200 lb (998 kg) / 1200 lb (544 kg) EE
TOWING CAPACITY	5000 lb (2268 kg) / 3000 lb (1361 kg) EE	
OUTSIDE CLEARANCE CIRCLE	21.25 ft (6.47 m)	
INTERSECTING AISLE CLEARANCE	84.0 ft (213 cm)	
SPEED	14 mph +/- 0.5 mph (21 kph +/- 0.8 kph) / 10 mph +/- 0.5 (16 kph +/- 0.8 kph) EE	
STEERING & SUSPENSION		
STEERING	Rack and Pinion	
FRONT SUSPENSION	Independent, Transverse Leaf Spring, Shocks	
REAR SUSPENSION	Leaf Springs & Shock Absorbers	
SERVICE BRAKE	Front & Rear Hydraulic	
PARKING BRAKE	Hand Operated	
FRONT/REAR TIRES	5.70 x 8 (Load Range C)	

www.cushman.com

©2015 Textron Specialized Vehicles Inc. All rights reserved.
800.241.5855

82324-G3 (Rev. 03/2016)