


JCB Teletruk Variable Reach Forklifts

Lift capacities of 6,000 and 7,000 lbs @ 24" load centre

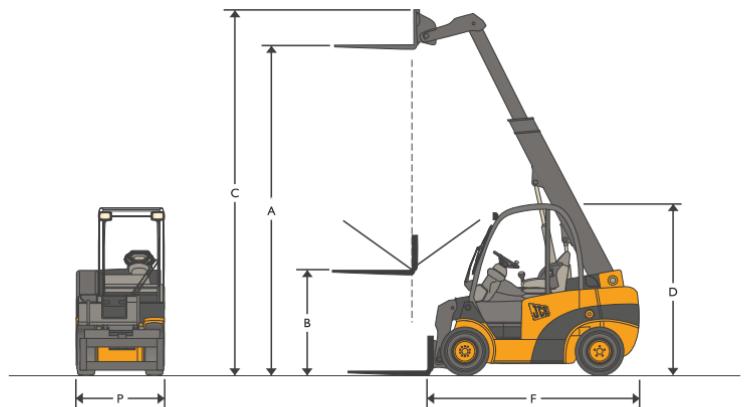

| Model | Ref | TLT30DHL | TLT35D | TLT35D 4x4 |
|------------------------------------------|-----|-------------|------------|--------------|
| Lift capacity @ 24 in load centre | | 6 000 lbs | 7 000 lbs | 7 000 lbs |
| Lift capacity @ maximum forward reach | | 1 089 lbs | 3 250 lbs | 3 250 lbs |
| Maximum reach with boom horizontal | | 130 in | 95.6 in | 96.4 in |
| Lift height | A | 16 ft 10 in | 14 ft | 14 ft |
| Free lift (standard) | B | 48 in | 47.6 in | 53 in |
| Height boom extended | C | 18 ft 8 in | 16 ft 3 in | 16 ft 5 in |
| Height of overhead guard (std/low) | D | 88.5/83 | 88.5/83 in | 90.5/86.6 in |
| Length to fork face | F | 133 in | 118 in | 126 in |
| Maximum width | P | 50 in | 50 in | 55 in |
| Underclearance | | 6.0 in | 6.0 in | 7.0 in |
| Turning radius | | 114 in | 114 in | 138 in |
| Aisle width 90° stacking | | 184 in | 184 in | 207 in |
| Engine type | | Diesel | Diesel | Diesel |
| Engine model | | Kohler | Kohler | Kohler |
| Gross engine output | | 62 hp | 62 hp | 62 hp |
| Rated rpm | | 2 600 | 2 600 | 2 600 |
| Weight unladen | | 11 860 lbs | 11 243 lbs | 12 125 lbs |

Because of our constant dedication to product improvement, all specifications are subject to change without notice.

— All JCB Teletruk meets or exceeds all ANSI B56.1 safety standards. —

Lift capacity @
other side of
truck/trailer

