





C-G

13,000-15,000 lb Capacity
IC Pneumatic Tire

Specifications



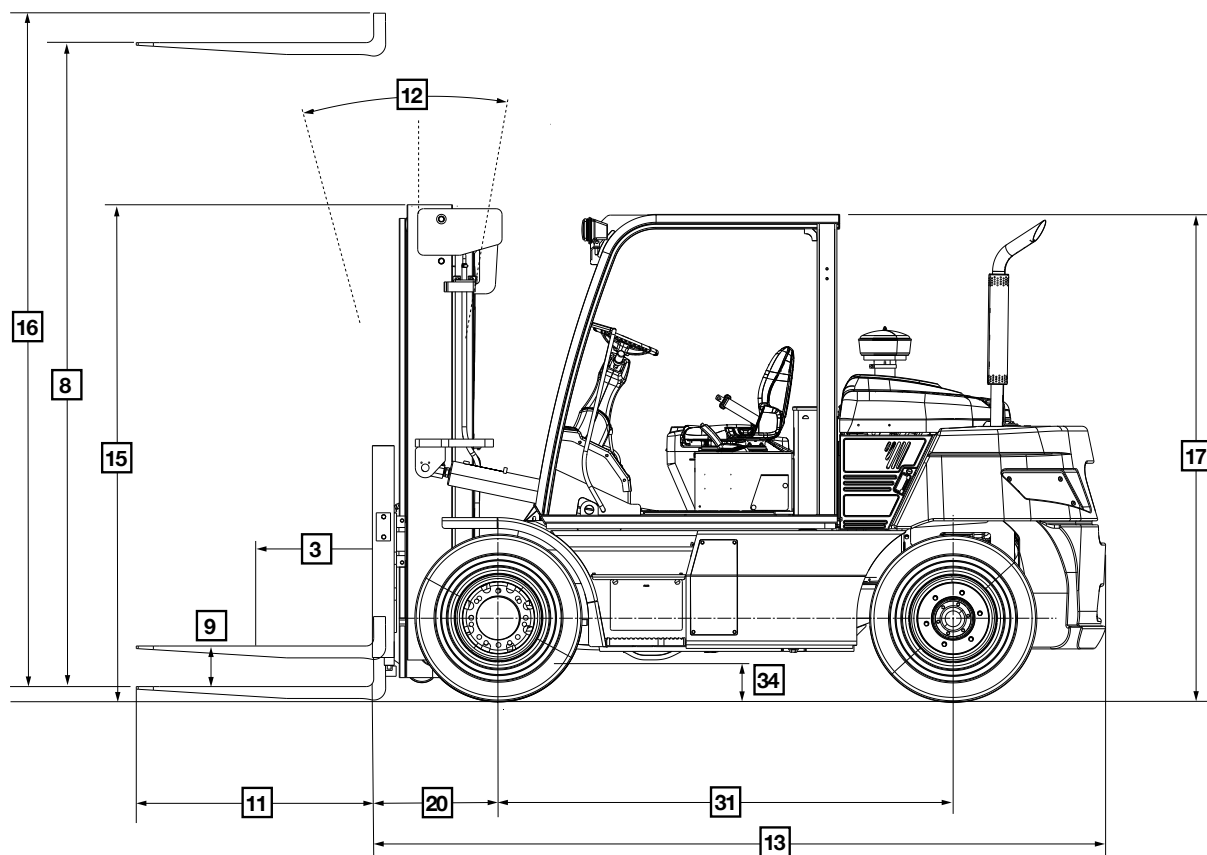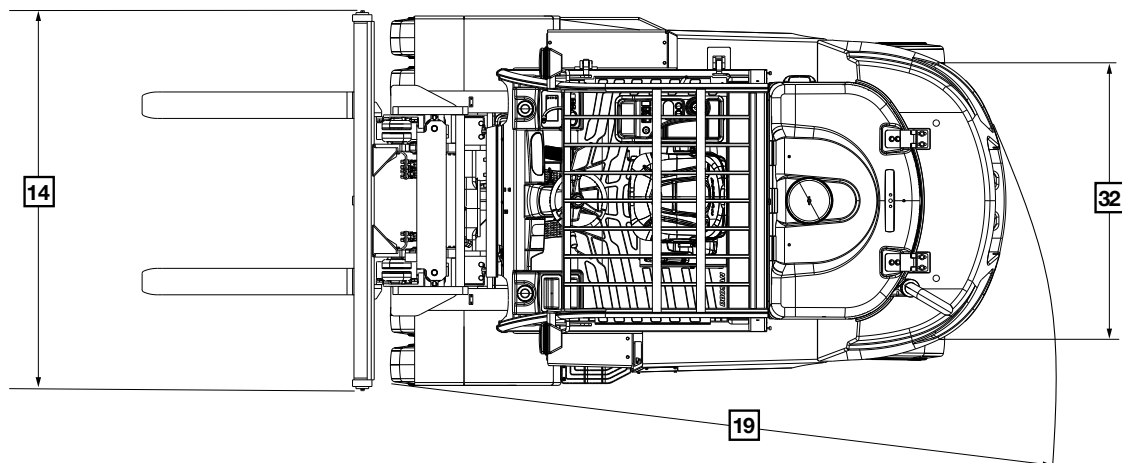

C-G Series

Specifications

Characteristics	1	Model			CG60S-7	CG70S-7
	2	Load Capacity	At Rated Load Center	lb (kg)	13,200 (6,000)	15,400 (7,000)
	3	Load Center	Distance	in (mm)	24 (600)	24 (600)
	4	Power Type	Elec, Diesel, LPG, Gasoline		LPG	LPG
	5	Operator Type			Sit-down	Sit-down
	6	Tire Type	P:Pneumatic		P	P
	7	Wheels (x = driven)	Front / Rear		x 4 / 2	x 4 / 2
Dimensions	8	Maximum Fork Height	with Std 2-Stage Mast	in (mm)	118 (3,000)	118 (3,000)
	9	Free Lift		in (mm)	8.1 (205)	8.1 (205)
	10	Fork Carriage	ISO Class		IV	IV
	11	Forks	Length x Width x Thickness	in (mm)	47.2x7.1x2.4 (1,200x180x60)	47.2x7.1x2.4 (1,200x180x60)
	12	Tilt of Mast	Forward / Backward	deg	15 / 10	15 / 10
	13	Overall Dimensions	Length to Fork Face	in (mm)	142.4 (3,618)	145.6 (3,697)
	14		Overall Width	in (mm)	83 (2,108)	83 (2,108)
	15		Mast Lowered Height	in (mm)	98.4 (2,500)	98.4 (2,500)
	16		Mast Extended Height	in (mm)	170.1 (4,320)	170.1 (4,320)
	17		Overhead Guard Height	in (mm)	96.7 (2,455)	96.7 (2,455)
	18		Seat Height	in (mm)	57.3 (1,455)	57.3 (1,455)
	19	Turning Radius	Minimum Outside	in (mm)	133.1 (3,380)	135.0 (3,430)
	20	Load Moment Constant		in (mm)	24.9 (632)	24.9 (632)
Performance	21	Travel Speed	Loaded / Unloaded	mph (km/h)	14.0 / 14.7 (22.6 / 23.7)	14.0 / 14.5 (22.6 / 23.4)
	22	Lifting Speed	Loaded / Unloaded	fpm (mm/s)	74.8 / 80.7 (380 / 410)	74.8 / 80.7 (380 / 410)
	23	Lowering Speed	Loaded / Unloaded	fpm (mm/s)	96.5 / 90.6 (490 / 460)	96.5 / 90.6 (490 / 460)
	24	Drawbar Pull	Loaded at 1.0 mph (1.6 km/h)	lb (kg)	9,396 (4,262)	9,339 (4,236)
	25	Gradeability	Loaded at 1.0 mph (1.6 km/h)	%	30	26.5
Weight	26	Total Weight	Unloaded	lb (kg)	19,279 (8,745)	20,779 (9,425)
	27	Axle Load	Loaded, Front / Rear	lb (kg)	29,277 / 3,373 (13,280 / 1,530)	32,221 / 4,133 (14,615 / 1,875)
	28		Unloaded, Front / Rear	lb (kg)	8,907 / 10,373 (4,040 / 4,705)	8,455 / 12,324 (3,835 / 5,590)
Chassis	29	Tires	Size, Front		8.25x15-14	8.25x15-14
	30		Size, Rear		8.25x15-14	8.25x15-14
	31	Wheelbase	Distance	in (mm)	90.6 (2,300)	90.6 (2,300)
	32	Tread Width	Front / Rear	in (mm)	62.4 / 61.0 (1,586 / 1,550)	62.4 / 61.0 (1,586 / 1,550)
	33	Ground Clearance	Loaded at the lowest point	in (mm)	6.9 (176)	6.9 (176)
	34		Loaded at center of wheelbase	in (mm)	8.1 (205)	8.1 (205)
	35	Brakes	Service		Foot / Hyd	Foot / Hyd
	36		Parking		Hand / Mechanical	Hand / Mechanical
Power Train	37	Battery	Voltage / Ampere	V/AH	12 / 75	12 / 75
	38	Engine	Manufacturer / Model		PSI 4.3L (Tier III)	PSI 4.3L (Tier III)
	39		Rated Output (at rpm)	HP/rpm	93.8 / 2,500	93.8 / 2,500
	40			kW/rpm	70 / 2,500	70 / 2,500
	40		Maximum Torque	ft-lb/rpm	209.4 / 1,800	209.4 / 1,800
	40			n_m/rpm	283.9 / 1,800	283.9 / 1,800
	41		Cycle / Cylinders / Displacements	CC	4 / 6 / 4,294	4 / 6 / 4,294
	42	Transmission	Type		Powershift	Powershift
	42		Number of Speeds (Fwd / Rev)		2 / 2	2 / 2
	43	Operating Pressure	Attachment	psi (bar)	2,030 (140)	2,030 (140)

Note: Specification values quoted in this specification sheet have been rounded. Performance may vary due to operation conditions. Products and specifications are subject to improvement and change without prior notices.

C-G Series

Specifications

Mast Chart CG60S-7

Mast Type	Maximum Fork Height		Maximum Lowered Height		Fully Extended Height		Free Lift		Rated Load Capacities			
									CG60S-7			
									Tilt Angle		Load Capacities	
									Double Pneumatic		Double Pneumatic	
									FWD	BWD	LC24in	LC600mm
	in	mm	in	mm	in	mm	in	mm	deg	deg	lb	kg
TL	122	3100	98	2495	168	4275	8	205	15	10	13,200	6000
	130	3300	108	2745	188	4775	8	205	15	10	13,200	6000
	142	3600	112	2845	196	4975	8	205	15	10	13,200	6000
	161	4100	118	2995	208	5275	8	205	15	10	13,200	6000
	181	4600	132	3345	227	5775	8	205	15	10	13,200	6000
	201	5100	142	3595	247	6275	8	205	15	10	13,200	6000
	220	5600	151	3845	267	6775	8	205	15	10	12,900	5850
	236	6000	161	4045	286	7275	8	205	15	10	12,450	5650
TT	179	4550	100	2540	219	5570	62	1580	15	10	12,950	5900
	197	5000	106	2690	237	6020	68	1730	15	10	12,550	5725
	220	5600	114	2890	261	6620	76	1930	15	10	12,100	5500
	238	6050	120	3040	278	7070	82	2080	15	10	11,650	5300

Mast Chart CG70S-7

Mast Type	Maximum Fork Height		Maximum Lowered Height		Fully Extended Height		Free Lift		Rated Load Capacities			
									CG70S-7			
									Tilt Angle		Load Capacities	
									Double Pneumatic		Double Pneumatic	
									FWD	BWD	LC24in	LC600mm
	in	mm	in	mm	in	mm	in	mm	deg	deg	lb	kg
TL	118	3000	98	2495	168	4275	8	205	15	10	15,400	7000
	138	3500	108	2745	188	4775	8	205	15	10	15,400	7000
	146	3700	112	2845	196	4975	8	205	15	10	15,400	7000
	157	4000	118	2995	208	5275	8	205	15	10	15,400	7000
	177	4500	132	3345	227	5775	8	205	15	10	15,400	7000
	197	5000	142	3610	247	6275	8	205	15	10	15,400	7000
	217	5500	151	3845	267	6775	8	205	15	10	15,400	7000
	236	6000	161	4090	286	7275	8	205	15	10	15,100	6900
TT	179	4550	100	2540	219	5570	62	1580	15	10	15,400	7000
	197	5000	106	2690	237	6020	68	1730	15	10	15,400	7000
	220	5600	114	2890	261	6620	76	1930	15	10	14,750	6690
	238	6045	120	3040	278	7070	82	2080	15	10	14,300	6500

Note: Mast Specifications and Rated Capacities are based on standard chassis with dual pneumatic tire and without side shifter.

Standard Features

1. PSI 4.3 Liter V6 LPG engine compliant to current EPA standards
2. 2 Speed Powershift transmission with Autoshift feature
3. Cast Iron one piece axle housing
4. Oil-cooled Disc Brakes – Fully enclosed with 5 year 10,000 hr warranty
5. Rugged steer axle with large King Pins and tapered roller bearings
6. Lift and Tilt locking hydraulic valve
7. Carriage Side Thrust rollers
8. Dual Element air cleaner with high air intake
9. Operator design features
 - Wide Spacious floorboard
 - Tilt Steering Column
 - Suspension seat (vinyl or cloth) with high visibility seat belt
 - OSS Operator Sensing System
 - Park brake alarm and seat belt indicator
 - Low front cowl/dash optimizes site lines
 - Clear view overhead guard and mast design
 - Large Dual Mirrors
 - Front Halogen Work Lights
 - Easy to read gauges monitor engine oil pressure, engine coolant, transmission temp, brake oil level and mast interlock

Optional Equipment

1. Tilt Position Assist
2. Adjustable Top Speed Control
3. Hydraulic Lift Circuit Accumulators
4. Pre-Cleaner Air Intake
5. Panoramic Mirror
6. Fuel Sensor Light / Alarm
7. 12 Volt auxiliary supply
8. Fire Extinguisher
9. Combo Lights with Turn signals
10. Enclosed Cab
11. Solid Pneumatic (super-elastic) Tires
12. Various Light Packages
13. Static Strap
14. InfoLink®
15. Quick Disconnect Attachment Couplings

Other Options

1. Audible travel alarm
2. Flashing Lights
3. Floor Spotlight

Safety considerations and dangers associated with audible travel alarms and flashing lights include:

- Multiple alarms and/or lights can cause confusion.
- Workers ignore the alarms and/or lights after day-in and day-out exposure.
- Operator may transfer the responsibility for “looking out” to the pedestrians.
- Annoys operators and pedestrians.

Other Options Available

Contact your local Crown dealer.

Dimensions and performance data given may vary due to manufacturing tolerances.

Performance is based on an average size vehicle and is affected by weight, condition of truck, how it is equipped and the conditions of the operating area. Crown products and specifications are subject to change without notice.



Crown Equipment Corporation
New Bremen, Ohio 45869 USA
Tel 419-629-2311
Fax 419-629-3796
crown.com

You can count on Crown to sell lift trucks designed for safe operation, but that's only part of the safety equation. Crown encourages safe operating practices through ongoing operator training, safety-focused supervision, maintenance and a safe working environment. Go to crown.com and view our safety section to learn more.

Because Crown is continually improving its products, specifications are subject to change without notice.

Crown, the Crown logo, the color beige, the Momentum symbol, and InfoLink are trademarks of Crown Equipment Corporation in the United States and other countries.

Copyright 2018-2019 Crown Equipment Corporation
SF19897 Rev. 03-19
Printed in U.S.A.