



Cushion Forklift Trucks

CGC15S/CGC18S-5 & CGC20SC-5

CGC20E/CGC25E/CGC30E/CGC33E-5

CGC20P/CGC25P/CGC30P/CGC33P-5

1,500kg to 3,250kg Capacity

PRO5
SERIES

PRO5
SERIES



CGC15S/CGC18S-5 & CGC20SC-5
1500kg, 1750kg, 2000kg
Cushion Tire



CGC20E/CGC25E/CGC30E/CGC33E-5
CGC20P/CGC25P/CGC30P/CGC33P-5
2000kg, 2500kg, 3000kg, 3250kg
Cushion Tire



(May, 2007)



Crown Equipment Pty Ltd

Australia Head office : Corner Long Cooper Streets Smithfield NSW
2164 Australia
Tel : +61 2 8788 0000 Fax : +61 2 9609 1702
Singapore Head office : 15 Tuas Avenue 8 Tuas 639230 Singapore
Tel : +65 6861 3669 Fax : +65 6861 0175
New Zealand Head office : 18 Andromeda Crescent East tamaki Auckland
1701 New Zealand
Tel : +64 9 274 4069 Fax : +64 9 273 7855

www.crown.com

Because Crown is continually improving its products, specifications are subject to change without notice.

Crown, the colour beige, the Momentum symbol are trademarks of Crown Equipment Corporation.

Copyright 2006 Crown Equipment Corporation
Ref : ASF0035
Printed in Australia.

Redesigned....From The Ground Up!

Crown's Outstanding Reputation for Durable, Dependable and Operator Friendly forklifts is Further Enhanced with Our New 1,500kg to 3,250kg Heart-of-the-Line Pro 5 Series. Providing a Well Balanced Mix of Enhanced Technology, Operator Comfort Refinements, Performance Efficiencies and Serviceability Advances, These New Cushion forklifts will Increase Productivity and lower your Operating Costs with Features Like:

- ✓ *Optimised Operator Comfort Provisions*
- ✓ *High Powered, Fuel efficient, and Tier-3 Compliant LPG Engine*
- ✓ *Virtually Maintenance-free Oil cooled Disc Brakes*
- ✓ *Power Reversal Transmission*
- ✓ *Lift and Tilt Locking Hydraulic Control Valve*
- ✓ *OSS(Operator Sensing System)*



A Comfortable Operator Enhances Truck Performance

Our ergonomically designed and spacious operator compartment combined with a variety of operational enhancements will facilitate ease of operation and help boost output in any application.



Operator Friendly Features Include:

- **Spacious and Well Planned Operator compartment**

Ample operator leg room, tiltable steering column and ergonomically positioned operator pedals combined with a low cowl height facilitate ease of operation.



- **Integrated Instrument Panel**

The centralized and integrated easy-to-read instrument panel maximizes operator efficiency. Fuel gauge, engine hour meter, engine oil pressure, coolant and transmission temperature, mast interlock, transmission neutral, seat belt, brake oil level indicator keeps operator aware and informed of all vehicle performance systems.



- **Convenience Package**

Handles refreshments, paperwork, small tools, etc. for operator efficiency.



- **Auto Tilt Leveling (Optional)**

Returns mast to upright vertical position with the push of a button.



- **Operator Sensing System**

- ✓ Parking alarm : Alarm warning when operator leaves the seat without applying parking brake
- ✓ Seat belt indicator : Seat belt warning light for 10 seconds reminds operator to fasten seat belt
- ✓ Neutral shift feature : Transmission is automatically shifted into neutral when the operator leaves the seat.



- **Rear Grab Bar with Horn (Optional)**

When operator drives in reverse, rear grab bar enables horn activation to alert surrounding personnel.



Engine Compartment Designed for Service Ease



High Powered and Fuel - Efficient LPG Engines Provide High Performance Levels

The Crown forklifts powerful 2.0L, 2.4L LPG engine for reduced emissions. These in-line, 4-cylinder, water cooled, overhead valve engines provide high torque at low engine speeds for applications requiring ramp loading and unloading, fast lift speeds, or heavy hydraulic flow requirements.



● G420F(E) LPG Engine

The low fuel consumption and highly-efficient 2.0 liter G420F(E) LPG engine includes automatic valve lash adjusters which help to reduce engine maintenance. Five main bearings provide a solid and stable support base to the crankshaft for additional durability and longer life.



● G424F(E) LPG Engine

The optional 2.4 liter G424F(E) LPG engine provides greater torque and higher performance. The engine includes automatic valve lash adjusters which help to reduce engine maintenance. Five main bearings provide a solid and stable support base to the crankshaft for additional durability and a longer life.

● Integration of Electrical Components for Easy Maintenance

Fuse and relay box located in front of engine.



● Dual Element Air Cleaner

Heavy duty air cleaning system extends engine service life and allows clean, cool air into the engine intake system.



● Tool - less Side Cover and Floor Plate Simplifies Serviceability



A Hallmark of Durability and Reliability



Crown's Goal is to Make Your Material Handling Operation as Efficient and Reliable as Possible by Minimizing Your Forklifts Down Time to Reduce Overall Maintenance Cost.

● Oil- Cooled Disc Brakes(ODB)

Virtually maintenance-free, ODB is standard equipment on all 1,500kg~3,000kg series forklifts. The enclosed brake system eliminates outside contamination significantly extending the brake life up to 5 times longer when compared to conventional shoe brakes. That's why they come with our industry exclusive warranty.



● Power reversal transmission

Top mounted control valve
✓ accurately modulates clutch oil pressure
✓ smooth forward / reverse direction changes
✓ long transmission life



Top located plug type test ports
✓ easy to check and clean

● Full floating drive axle

Strong one-piece cast housing
✓ axle components aligned
✓ high tensile alloy steel axle shaft extends axle life



Splined side gear, drive hub gears transmit high torque to drive wheels

● Hydrostatic steering system

✓ Fully hydrostatic steering
✓ Self-aligning taper roller bearings
✓ Designed to operate in contaminated environments and high impact applications
✓ Low effort steering and faster response



● Increased Cooling Capacity

Aluminum radiator provides excellent cooling capacity with improved air flow.





Proven Quality, Responsive Service and A Reliable Partner...

After sales servicing of Crown forklifts is available from the branch dealership backed by Crown's own customer service centre. And Crown provides 100% parts inventory to insure any downtime is minimized.

When you own a Crown forklift, our high quality, responsive customer support team comes with it.

The Crown network starts with your local dealer and ends with a national team of highly qualified and experienced personnel standing ready to support all your material handling needs.

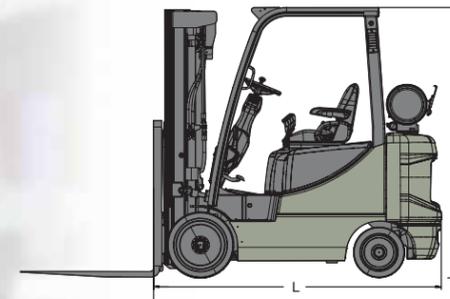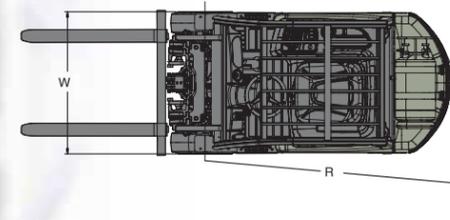

Option Availability

● : Standard ○ : Optional

Options	CGC15/18S-5 & CGC20SC-5	CGC20/25/30/33E-5	CGC20/25/30/33P-5
Drive in Rack Overhead Guard	○	○	○
Oil- Cooled Disc Brakes	●	●	●
Precleaner	○	○	○
Catalytic Muffler	n/a	○	○
Modular Operator Cabin	n/a	○	○
Radiator Screen	○	○	○
Non Marking Tire(Solid)	○	○	○
Mono Pad Foot Direction and Acceleration Control	○	○	○
AutoShift (Single,Dual Tire)	○	○	○
Engine Shutdown	○	○	○
Swingout LP MTG	n/a	○	○
Swingdown LP MTG	n/a	○	○
Lift and Tilt locking Hydraulic Control Valve	●	●	●
Auto Tilt Leveling	○	○	○
Rear Grab Bar with Horn	○	○	○
Quad Mast	n/a	○	○
Hydraulic Accumulator	○	○	○
Integral Sideshifter	○	○	○
Integral Shifting Fork Positioner	○	○	○
Hook on Sideshifter	○	○	○
UL LPS,DS Rating	○	○	○

Main Specification

Sales Model		CGC15S-5	CGC18S-5	CGC20SC-5	CGC20E-5	CGC25E-5	CGC30E-5
Rated Load Capacity	kg	1500	1750	2000	2000	2500	3000
Load Centre	mm	500	500	500	500	500	500
Overall Length to Fork Face	L mm	2051.5	2106.5	2138.5	2218	2268	2333
Truck Overall Width	W mm	940	991	991	1110	1110	1110
Height of Overhead Guard	H mm	2060	2060	2060	2150	2150	2150
Minimum Turning Radius	R mm	1816	1881	1932	2000	2045	2105
Travel Speed, Loaded	km/h	18	18	18	16	16	16
Lifting Speed, Loaded	mm/s	600	600	600	530	510	500
Wheel Base	mm	1225	1225	1225	1410	1410	1410
Engine Models		G420F(E)			G420F(E)		
Rated Power of Engine	HP(kW)/rpm	46(34)/2300			54(40)/2500		
Max Torque	kgf.m/rpm	15/1600			16/1600		
Displacements	cc	1975			1975		

Sales Model		CGC33E-5	CGC20P-5	CGC25P-5	CGC30P-5	CGC33P-5
Rated Load Capacity	kg	3000	2000	2500	3000	3000
Load Centre	mm	600	500	500	500	600
Overall Length to Fork Face	L mm	2368	2218	2268	2333	2368
Truck Overall Width	W mm	1110	1110	1110	1110	1110
Height of Overhead Guard	H mm	2150	2150	2150	2150	2150
Minimum Turning Radius	R mm	2135	2000	2045	2105	2135
Travel Speed, Loaded	km/h	16	16	16	16	16
Lifting Speed, Loaded	mm/s	500	530	510	500	500
Wheel Base	mm	1410	1410	1410	1410	1410
Engine Models		G420F(E)	G424F(E)			
Rated Power of Engine	HP(kW)/rpm	54(40)/2500	64(48)/2550			
Max Torque	kgf.m/rpm	16/1600	19/2200			
Displacements	cc	1975	2405			